



LSE Series

The LSE range of VRLA batteries offers outstanding performance including a 15+ year design life and a cycle life in excess of 1200 cycles to 80% DOD. Built to the highest standards and compliant with the latest IEC 60896-21/22 standard this range also offers 100% capacity out-of-the-box and is capable of handling deep discharges for complete peace of mind. The use of flexible connectors and the ability to be installed both horizontally and vertically allows for multiple installation possibilities. This robust design uses the latest AGM technology to create a range that is suitable for many applications including both fixed and mobile telecoms, UPS, utilities and solar.

Application


- Cable Television
- Communication Equipment
- Security System
- UPS
- Control Equipment
- Medical Equipment
- Emergency Power System
- Power Plant

General Features




- Extra long life service design.
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- Higher safety & reliable construction.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

Construction





- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerABS
- CoverABS
- SealantEpoxy Resin
- Safety valveEPDR
- TerminalCopper
- SeparatorFiber glass
- ElectrolyteSulfuric acid



Terminal Dimensions

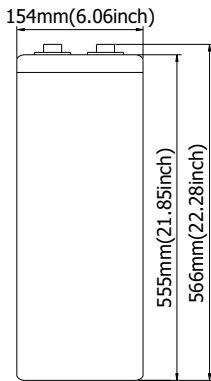

Battery Model	LSE2-800			
Designed Floating Life	15 Years			
Capacity(25°C)	20HR(41.3A,1.75V)	10HR(80A,1.75V)	5HR(144A,1.75V)	1HR(440A,1.75V)
	826AH	800AH	720AH	440AH
Dimensions	Length	Width	Height	Total Height
	154mm(6.06inch)	229mm(9.02inch)	555mm(21.85inch)	566mm(22.28inch)
Approx. Weight	52Kg (114.54 lbs)			
Internal Resistance	Full charged at 25°C :0.21 mΩ			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.3V-2.35V(-5mV/ °C), max. Current: 200A		2.25-2.27V(-3.3mV/ °C)	

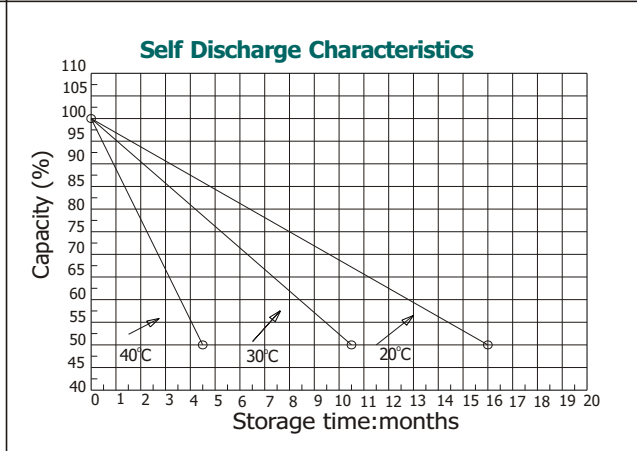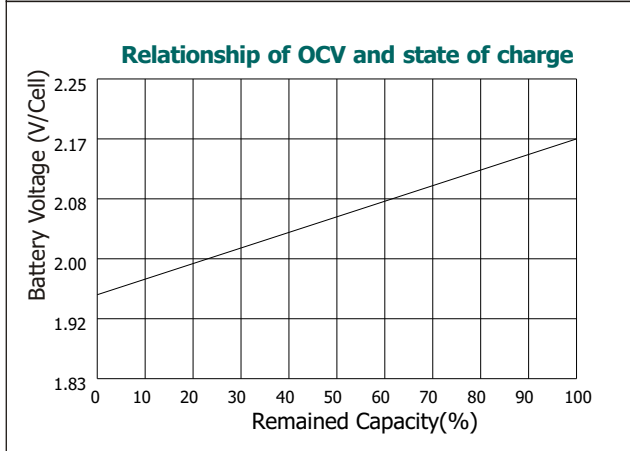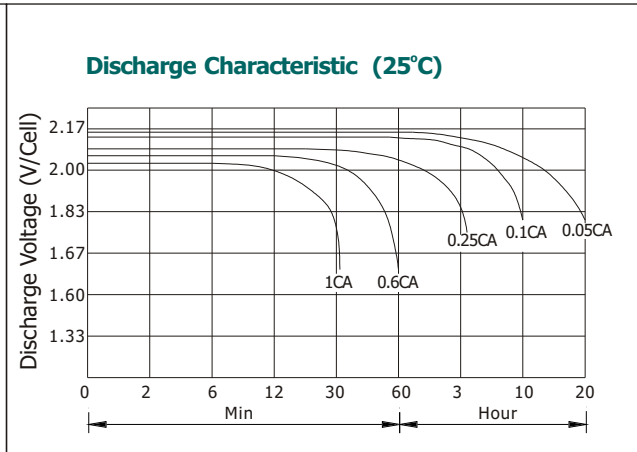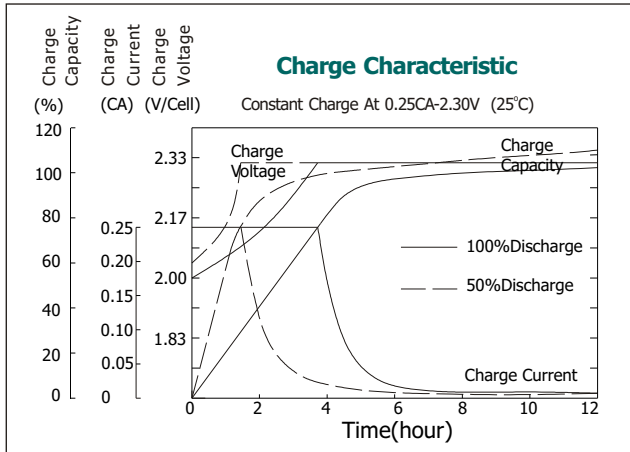

Constant current discharge ratings -amperes at 25°C

Time End Voltage	5min	15min	30min	60min	2hour	3hour	5hour	6hour	8hour	10hour	24hour
1.60V	1158.3	974.6	792.0	521.9	320.8	235.5	154.0	132.7	103.9	86.0	39.9
1.65V	1086.2	917.4	722.3	492.6	311.7	229.2	152.1	131.1	103.0	85.5	39.3
1.70V	1020.8	868.1	660.5	468.1	301.0	218.9	148.3	127.9	101.5	84.2	39.1
1.75V	963.0	817.1	609.0	441.9	289.9	213.8	145.7	126.0	100.1	83.5	38.8
1.80V	909.7	762.0	570.2	419.8	281.2	209.1	142.4	123.6	98.2	82.4	38.0
1.83V	842.6	701.4	532.2	396.0	269.3	202.8	140.2	122.0	97.6	82.0	38.0
1.85V	781.1	648.2	501.3	370.7	253.4	191.8	133.5	116.8	94.2	79.0	36.9
1.88V	717.1	586.3	466.1	336.6	135.0	180.8	127.2	111.3	90.8	76.0	35.8
1.90V	639.7	511.8	416.6	306.5	211.9	171.3	120.9	106.0	85.4	72.0	34.4
1.94V	575.8	465.2	382.5	275.6	189.1	146.9	106.3	93.7	76.6	65.3	30.6

Constant power discharge ratings-watts at 25°C

Time End Voltage	5min	15min	30min	60min	2hour	3hour	5hour	6hour	8hour	10hour	24hour
1.60V	1969.1	1656.9	1369.4	998.7	635.2	471.2	320.8	282.0	229.7	190.1	83.6
1.65V	1900.8	1605.4	1316.3	967.2	608.9	459.4	312.8	275.6	224.5	185.3	82.0
1.70V	1837.4	1562.6	1273.1	930.6	584.7	449.9	306.5	269.3	221.0	183.7	80.4
1.75V	1762.2	1495.3	1196.9	877.5	559.2	441.1	301.0	261.4	216.2	182.2	79.6
1.80V	1683.0	1409.8	1118.7	807.8	538.6	427.7	293	255.8	211.5	179.0	78.4
1.83V	1584.0	1318.7	1045.4	755.6	518.8	418.2	285.1	248.7	205.9	175.8	77.2
1.85V	1484.0	1231.6	966.2	692.2	499.0	403.9	277.2	241.6	199.4	169.5	75.2
1.88V	1384.0	1131.6	871.2	633.6	473.6	381.7	269.3	236.0	194.0	164.7	73.3
1.90V	1247.4	997.9	790.0	586.9	449.9	368.3	259.0	228.1	186.9	159.5	70.5
1.94V	1128.6	911.8	698.0	529.1	414.2	337.0	236.0	205.1	167.9	143.7	69.7